

# PHOENIX



**Severe Duty  
Commercial Rear Loader**



# **CURBTENDER**

[www.curbtender.com](http://www.curbtender.com)


701 PERFORMANCE DRIVE | CEDAR FALLS, IA 50613

PHONE: (319) 266-1721 | FAX: (319) 266-8207

© 2022 Curbtender, Inc. All Rights Reserved. Specifications subject to change.


### BODY SPECIFICATIONS

Body Capacity	25yd <sup>3</sup>	32yd <sup>3</sup>
A. Body Length	280"	324"
B. Height Of Body Above Chassis	95"	95"
C. Body Width	96"	96"
D. Hopper Opening Width	78"	78"
E. Hopper Opening Height	68"	68"
F. Loading Sill Above Chassis Frame	4.6"	4.6"
G. Height of Tailgate Above Chassis Frame (Tailgate Raised)	182"	182"
Hopper Capacity	2.8yd <sup>3</sup>	2.8yd <sup>3</sup>
Hopper Capacity w/ CLD	3.3yd <sup>3</sup>	3.3yd <sup>3</sup>
Dynamic Hopper Capacity (yd <sup>3</sup> /Min.)	6.5yd <sup>3</sup>	6.5yd <sup>3</sup>
Approximate Body Weight	15,670 LBS.	17,980 LBS.

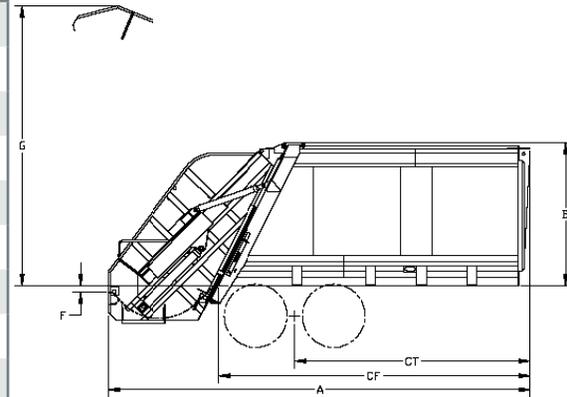

### MINIMUM CHASSIS REQUIREMENTS

Minimum GVWR Tandem	60,000 LBS.	66,000 LBS.
Front Axle	14,000 LBS.	20,000 LBS.
Rear Axle	46,000 LBS.	46,000 LBS.
CT: Cab to Tandem	156"	200"
CF: Minimum to End of Frame	205"	249"
Required Frame Height	39" to 43"	39" to 43"

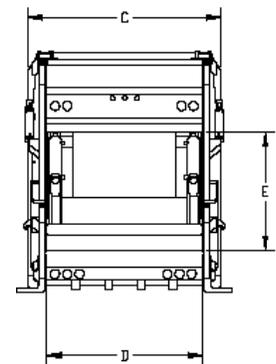

### Body Construction

- Body Sides: 10 Gauge GR80
- Body Roof: 10 Gauge GR80
- Body Floor: 3/16" GR100
- Trough Floor: 1/4" GR100
- Ejection Panel: 7 Gauge GR50
- Sweep Face: 1/4" AR400
- Tailgate Upper: 11 Gauge GR50
- Tailgate Lower: 3/16" GR100
- Tailgate Floor: 1/4" AR400

### Hydraulics

- Oil Reservoir: 50 Gal.
- Oil Flow w/ Standard Pump: 36 GPM
- Operating Pressure: 2,500 PSI
- Hose Burst Ratio: 4 to 1
- Return Filter: 10 Micron
- Pack Cylinders: 5"
- Sweep Cylinders: 5"

### Features

- High Strength Chiseled Body Side Wall Design
- High Compaction Rating
- Reinforced for Heavy Duty Commercial Waste Collection
- Split-Tailgate Design for Ultimate Service Access to Packer Area
- Auto Back-Pack
- Engine Accelerator
- Reservoir Sight Gauge
- Chrome Cylinder Rods
- 30" x 34" Access Door (Street Side)
- Driver Alert Buzzer (Curbside)
- LED ANSI/DOT Lighting & Work Lights
- Rear Camera System
- Pack Cycle Time: 24-28 Seconds
- 12 Month Warranty

### Optional Features

- Container Roll Bar with Lip-And-Latch
- 12,000 LBS. Reeving Winch
- 8,000 LBS. & 12,000 LBS. Overhead Drum Winch
- Single or Dual Cart Tipper(s)
- Cart Tipper Tap-In-Kits
- Arlock Container Lifting Device



Serving Washington, Idaho, Montana, Oregon